

TXD-隔爆/增安.铠装.胶封

TXD系列隔爆铠装(填料函、电缆戈兰)

cable gland




材质 Material	黄铜镀镍或不锈钢304、316L (订货时请指明) Brass nickel plated or stainless steel 304, 316L (When ordering, please specify)	
特点 Features	适用于钢丝铠装、钢带铠装、编织带铠装、船用编组及铅护套电缆 Suitable for steel wire armored, steel band armored, braided armored, marine marshalling and lead sheathed cable	
防爆标志 Ex mark	Ex d IIC Gb/ DIP A20	防护等级 Degree of protection
工作温度 COT	-60°C ~100°C	



- 1、密封圈材质：硅橡胶
- 2、内部和外部双重密封套的电缆
- 3、提供用于导线的隔爆胶泥

- 1, sealing ring material: silicone rubber
- 2, internal and external double seal sets of cable
- 3, provide for explosive wires across the puddle

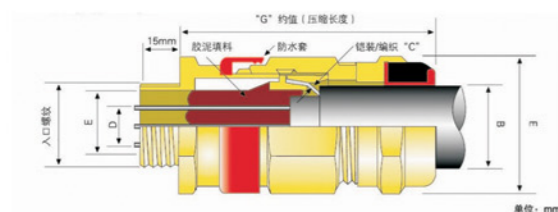

单位:mm

规格型号 Gland size	入口螺纹尺寸AG Entry thread size AG		螺纹长度 Thread length D	内层芯数 Number of inner core		外层电缆 Outer sheath B	最大外径E Max Across Corners E	G
	公制ISO Metric ISO	NPT/G		D1芯线最大 D1 core line is the largest	最大芯数 Maximum number of cores			
TXD-01S	M20 × 1.5	1 / 2	15	8.8	6	6-12	31	74
TXD-01	M20 × 1.5	1 / 2	15	8.8	6	9-16	31	74
TXD-02	M20 × 1.5	1/2or3/4	15	10.9	9	12.5-20.5	38	77
TXD-03	M25 × 1.5	3/4or1	15	16.1	20	16.9-26	45	85
TXD-04	M32 × 1.5	1or1-1/4	15	21.8	41	22-33	56	91
TXD-05	M40 × 1.5	1-1/4or1-1/2	15	26.2	59	28-41	66	95
TXD-06	M50 × 1.5	2	15	37	79	36-52.6	78	112
TXD-07	M63 × 1.5	2-1/2	15	47.7	100	46-65.3	101	112
TXD-08	M75 × 1.5	3	15	59	119	57-78	116	112

- 1、可选附件：变径接头、锁紧螺母、O型圈、平垫、锯齿垫圈、接地片
- 2、NPT螺纹长度为有效螺纹长度；

- 1, optional accessories: a variable diameter joint, a locking nut, O ring, flat pad, serrated washers, grounding piece
- 2, NPT thread length for effective thread length;

TN-隔爆/增安.铠装.胶封

TN系列隔爆型铠装电缆引入装置(电缆填料函、电缆戈兰)

cable gland




材质 Material	黄铜镀镍或不锈钢304、316L (订货时请指明) Brass nickel plated or stainless steel 304, 316L (When ordering, please specify)	
特点 Features	适用于钢丝铠装、钢带铠装、编织带铠装、船用编组及铅护套电缆 Suitable for steel wire armored, steel band armored, braided armored, marine marshalling and lead sheathed cable	
防爆标志 Ex mark	Ex d IIC Gb/ DIP A21 TA	防护等级 Degree of protection
工作温度 COT	-60°C ~100°C	



- 1、提供用于导线的隔爆胶泥
- 2、密封圈材质：硅橡胶(-60°C~+80°C)
- 3、用于区1区2、20、21区和22区
- 4、单向压铠装置适合所有类型的铠装电缆，安装简单的同时最大程度避免了错误安装情况

- 1, provide for explosive wires across the puddle
- 2, sealing material: silicone rubber (-60 or C~+80 or C)
- 3, 2, 20, 21, 22 and 1 in the area.
- 4, one-way pressure device is suitable for all types of armored armored cable, simple installation and To avoid the error of the installation of the situation

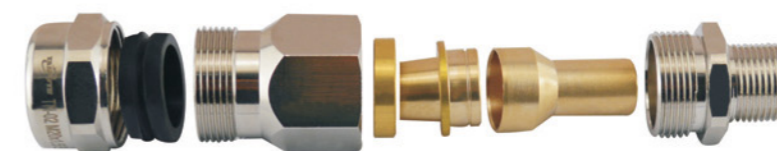

单位:mm

规格型号 Gland size	入口螺纹尺寸 Entry thread size		外层电缆 Outer sheath
	公制 Metric	NPT	
TN-01S	M16/M20*1.5	1 / 2	7.0-11.6
TN-01	M20*1.5	1 / 2	11.4-15.9
TN-02	M22*1.5	1 / 2	15.0-20.9
TN-03	M25*1.5	3 / 4	20.3-27.4
TN-04	M32*1.5	1	26.0-33.9
TN-05	M40*1.5	1_1/4	31.0-41.0
TN-06S	M50*1.5	1_1/2	36.5-46.7
TN-06	M50*1.5	2	43.0-53.1
TN-07S	M63*1.5	2	48.6-59.4
TN-07	M63*1.5	2_1/2	58-65.9
TN-08S	M75*1.5	2_1/3	60.6-72.1
TN-08	M75*1.5	3	64.9-78.5
TN-109	M90*1.5	3	76.0-90.3

- 1、可选附件：变径接头、锁紧螺母、O型圈、平垫、锯齿垫圈、接地片
- 2、NPT螺纹长度为有效螺纹长度；

- 1, optional accessories: a variable diameter joint, a locking nut, O ring, flat pad, serrated washers, grounding piece
- 2, NPT thread length for effective thread length;